

NSW-6619 / NSW-6629

Mini LED Step Light

Source: 1W LED

19lm / 29lm

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION

Mini LED Step Lights use the latest technology in solid state lighting. Mini Step Lights are available with louvered or lensed face and can be easily installed in a standard single gang switch box. Louvered unit includes both a horizontal and vertical louver. Use in hallways entrances, stairways, wall bases or any indoor application requiring a low profile, recessed fixture.

FEATURES

- Internal brackets for installation hardware.
- cULus Listed for Wet locations.
- Heavy duty, low profile aesthetic louver trim.
- 90+ CRI
- AC LED (no driver)

SPECIFICATION

LED Source: Standard mini step lights offer a total load of 1W.

Installation: Easily installs in a standard single gang switch box.

Housing: Sturdy galvanized steel construction.

Face Plate: Lensed face plate includes tempered glass and louvered face plate includes a horizontal and vertical louver.

ELECTRICAL

Voltage: 120VAC

Color Temperature: 2700K

Color Rendering Index: 90+ CRI

Lumens / Wattage: NSW-6619 = 19lm / 1W
NSW-6629 = 29lm / 1W

Life Expectancy: 30,000 hours at L70


Dimming: Non-Dimmable

LISTINGS AND WARRANTY

- cULus Listed for Wet Location
- 5-Year Limited Warranty




PRODUCT IMAGES AND DIMENSIONS

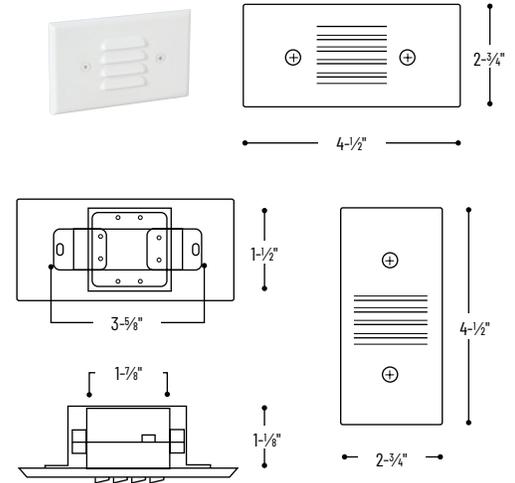

NSW-6619

Mini LED Step Light, Louver with Lens

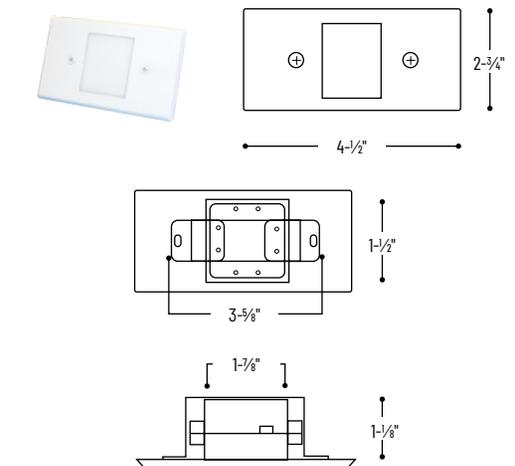

NSW-6629

Mini LED Step Light, Lens

Mini LED Step Light

Catalog No.

NSW-6619 = Louver Face Plate (includes Horizontal and Vertical)
NSW-6629 = Lens Face Plate

Finish

BN = Brushed Nickel
BZ = Bronze
W = White

Example: **NSW-6619BN** = Mini LED Step Light with Louvered Face Plate, Brushed Nickel finish